



洛陽百潤斯軸承有限公司

Luoyang BRS Bearing Co., Ltd.

Add: B-7-17, Wanguoyinzuo, Anhui Road, Luoyang, China Email: dennislee@brsbearing.com
Tel: +86-379-64850388 Fax: +86-379-64850788

BRS Four Point Contact Bearing VA series

Structure: Single row four point contact ball slewing bearing, external gear teeth, sealed on both sides.

Model	d(mm)	D(mm)	Width(mm)
VA140188-V	135	259.36	35
VA160235-N	171	318.6	40
VA160302-N	238	384	32
VA250309-N	235	408.4	60

BRS Four Point Contact Bearing Features:

1. Compact structure and light weight.
2. Able to support axial, radial and tilting moment loads at the same time.
3. Professional Surface treatment available such as blackening, galvanization(zinc-plating, zinc coating), antisepticize, corrosion prevention, rot proof, antiseptic, anticorrosive painting, etc. Ensure BRS Bearings function well under extreme working conditions.






洛陽百潤斯軸承有限公司

Luoyang BRS Bearing Co., Ltd.

Add: B-7-17, Wanguoyinzuo, Anhui Road, Luoyang, China Email: dennislee@brsbearing.com
Tel: +86-379-64850388 Fax: +86-379-64850788

VA140188-V Four point contact ball bearings

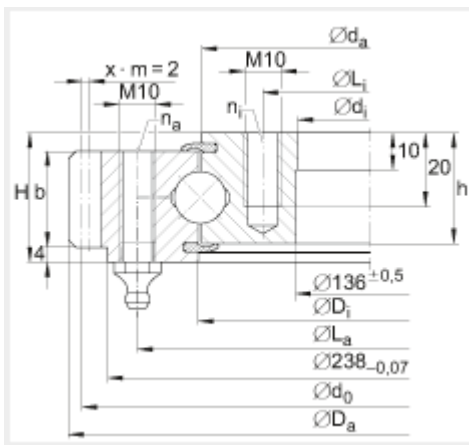

d 135 mm

D 259.36 mm

H 35 mm

Ca 118 KN Basic dynamic load rating, axial


Coa 410 KN Basic dynamic load rating, axial

Cr 77 KN Basic dynamic load rating, radial

Cor 185 KN Basic static load rating, radial

Mass 7.5 kg

VA160235-N Four point contact ball bearings

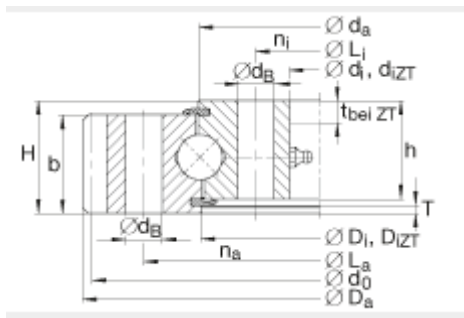

d 171 mm

D 318.6 mm

H 40 mm

Ca 153 KN Basic dynamic load rating, axial

Coa 345 KN Basic dynamic load rating, axial

Cr 101 KN Basic dynamic load rating, radial

Cor 156 KN Basic static load rating, radial

Mass 13 kg




洛陽百潤斯軸承有限公司

Luoyang BRS Bearing Co., Ltd.

Add: B-7-17, Wanguoyinzuo, Anhui Road, Luoyang, China Email: dennislee@brsbearing.com
Tel: +86-379-64850388 Fax: +86-379-64850788

VA160302-N Four point contact ball bearings

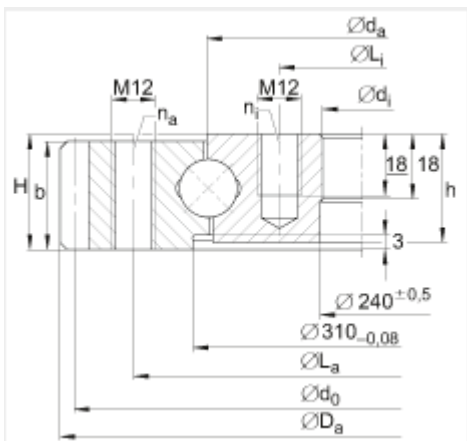

d 238 mm

D 384 mm

H 32 mm

Ca 168 KN Basic dynamic load rating, axial


Coa 445 KN Basic dynamic load rating, axial

Cr 110 KN Basic dynamic load rating, radial

Cor 200 KN Basic static load rating, radial

Mass 14 kg

VA250309-N Four point contact ball bearings

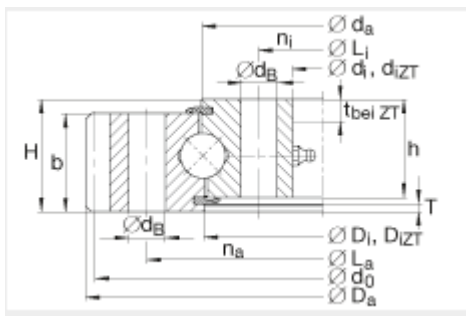

d 235 mm

D 408.4 mm

H 60 mm

Ca 325 KN Basic dynamic load rating, axial

Coa 650 KN Basic dynamic load rating, axial

Cr 215 KN Basic dynamic load rating, radial

Cor 295 KN Basic static load rating, radial

Mass 29.5 kg