



洛陽百潤斯軸承有限公司

Luoyang BRS Bearing Co., Ltd.

Add: B-7-17, Wanguoyinzuo, Anhui Road, Luoyang, China Email: dennislee@brsbearing.com
Tel: +86-379-64850388 Fax: +86-379-64850788

BRS Harmonic Reducer Drive Bearing CSF-XRB Series


Harmonic reducer drive is a special form of power transmission, it has the advantage of high transmission ratio, high precision, high loading capacity, high efficiency with light weight and small size compared with conventional transmission mode.

BRS CSF-XRB series crossed roller bearing is specially designed for CSF harmonic reducer. Its outer ring is separable and inner ring adopt integrated structure. Both inner ring and outer ring are processed with many precision holes for connecting with working parts.

Application

BRS Harmonic reducer bearing has a wide range of application in electronics industry, industrial automation, industrial robots, packaging machines, printing machines, and medical equipments because of its high precision, high rigidity and high transmission ratio.

Luoyang BRS Bearing Co., Ltd developed and produced CSF-XRB series harmonic reducer drive bearing, and focus on products' continuous improvement. BRS Harmonic Reducer Bearing CSF-XRB Series is characterized by high precision, compact structure, good sealing effect, high loading capacity and high rigidity. It's popular in domestic market, and also got favorable reputation from customers of Taiwan, Southeast Asia and Europe. To learn CSF-XRB series' price, detailed parameters, usage and installation, maintenance or other information please contact us.


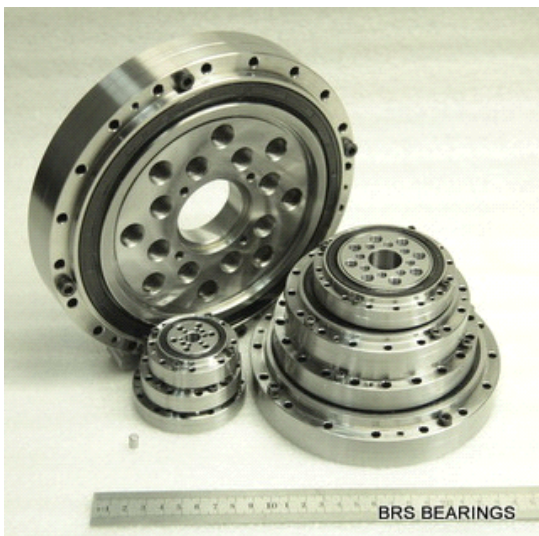




洛陽百潤斯軸承有限公司

Luoyang BRS Bearing Co., Ltd.

Add: B-7-17, Wanguoyinzuo, Anhui Road, Luoyang, China Email:dennislee@brsbearing.com
Tel:+86-379-64850388 Fax:+86-379-64850788

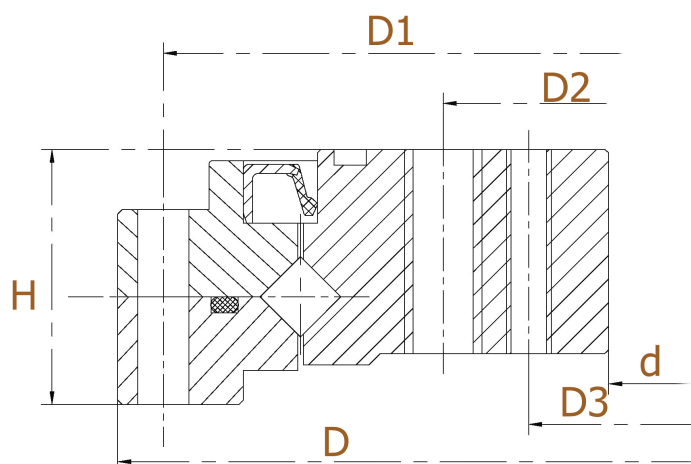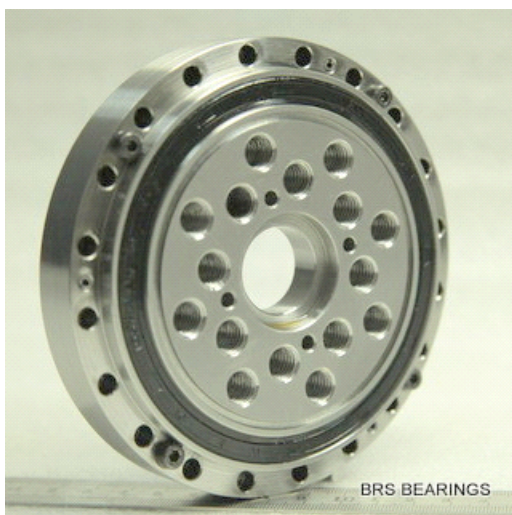

BRS Harmonic Reducer Drive Bearing CSF-XRB Series (Crossed Roller Bearing, Robot Bearing)

軸承型號	外形尺寸 (mm)			安裝孔尺寸 (孔中心徑及孔規格)						品質
Models	Boundary Dimension (mm)			Mounting Hole Size(PCD&SPEC)						Mass
	D	d	H	D1	D2	D3	φ1	φ2	φ3	kg
CSF14-XRB	55	9	16.5	49	23	14.5	8-φ3.5	6-M4	6-M3	0.35
CSF17-XRB	62	10	16.5	56	27	17.5	10-φ3.5	6-M5	6-M4	0.4
CSF20-XRB	70	14	16.5	64	32	24	12-φ3.4	8-M6	8-M5	0.5
CSF25-XRB	85	20	18.5	79	42	30	16-φ3.4	8-M8	8-M6	0.72
CSF32-XRB	112	26	22.5	104	55	40	16-φ4.5	8-M10	8-M8	1.74
CSF40-XRB	126	24/32	24	117	68	50	20-φ5	8-M10	8-M10	2.32
CSF50-XRB	157	32/40	31	147	84	60	16-φ5.5	8-M14	8-M14	4.64
CSF65-XRB	210	44/52	39	198	110	80	20-φ6.5	8-M16	8-M16	9.85